


BUTTWELD FITTINGS WEIGHTS & DIMENSIONS

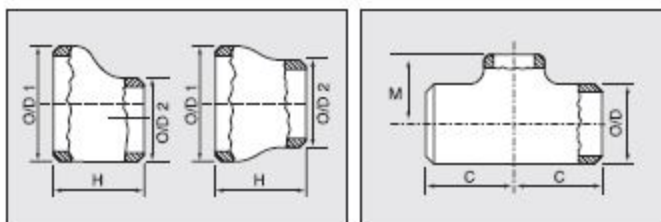

Nominal Size		WT SCH	Concentric and Eccentric Reducers		Reducing Tees		
mm OD1 X OD2	inch OD1 X OD2		H	Weight	C	M	Weight
350 X 150	14 X 6	5S	330	10.81	279	238	34.39
		10S		13.18			41.34
		40S		26.36			67.27
		80S		35.37			80.91
		160		-			-
		XXS		-			-
350 X 200	14 X 8	5S	330	11.41	279	248	34.79
		10S		13.91			41.83
		40S		27.83			68.18
		80S		36.92			81.82
		160		-			-
		XXS		-			-
350 X 250	14 X 10	5S	330	11.84	279	257	35.60
		10S		14.44			42.80
		40S		28.89			70.00
		80S		38.82			84.09
		160		-			-
		XXS		-			-
350 X 300	14 X 12	5S	330	12.56	279	270	36.41
		10S		15.32			43.77
		40S		30.65			71.36
		80S		40.44			85.91
		160		-			-
		XXS		-			-
400 X 200	16 X 8	5S	356	14.72	305	273	44.43
		10S		16.73			50.00
		40S		33.46			85.00
		80S		44.31			102.27
		160		-			-
		XXS		-			-
400 X 250	16 X 10	5S	356	15.62	305	283	44.95
		10S		17.75			50.91
		40S		35.51			85.91
		80S		46.36			103.64
		160		-			-
		XXS		-			-

Nominal Size		WT SCH	Concentric and Eccentric Reducers		Reducing Tees			
mm OD1 X OD2	inch OD1 X OD2		H	Weight	C	M	Weight	
400 X 300	16 X 12	5S	356	305	295	305	16.18	
		10S					18.39	51.82
		40S					36.78	87.73
		80S					47.73	105.91
		160					-	-
		XXS					-	-
400 X 350	16 X 14	5S	356	305	305	305	16.58	
		10S					18.85	53.18
		40S					37.69	90.00
		80S					49.09	108.18
		160					-	-
		XXS					-	-
450 X 250	18 X 10	5S	381	343	308	308	18.54	
		10S					21.06	65.00
		40S					42.13	110.45
		80S					54.55	132.73
		160					-	-
		XXS					-	-
450 X 300	18 X 12	5S	381	343	321	321	18.94	
		10S					21.52	66.91
		40S					43.05	111.82
		80S					57.27	134.55
		160					-	-
		XXS					-	-
450 X 350	18 X 14	5S	381	343	330	330	19.31	
		10S					21.95	67.27
		40S					43.89	114.09
		80S					57.73	137.73
		160					-	-
		XXS					-	-
450 X 400	18 X 16	5S	381	343	330	330	19.84	
		10S					22.55	69.09
		40S					45.09	116.82
		80S					59.09	140.45
		160					-	-
		XXS					-	-

NOTE: Weights and dimensions listed above are a guide only. Dimensions in mm. Weights in kg.

WOR: Weight on request

* There are 2 possible dimensions for this size, refer to ANSI B16.9

Weights and dimensions of larger Butt-weld Fittings are available from your local Prochem office.